


- NOTES:
1. ROOF SHEATHING SHALL BE 1/2" STRUCTURAL I PLYWOOD WITH:
12d @ 6" O.C. EDGE NAILING (EN.)
12d @ 12" O.C. FIELD NAILING (FN.)
UNLESS NOTED OTHERWISE.
BLOCK ALL EDGES.
PANEL ID INDEX = 32/16
 2. BEGIN PLYWOOD SHEET LAYOUT FROM EDGE OF BLOCKING WITH FULL SHEETS RUNNING PERPENDICULAR TO RAFTERS. STAGGER EDGES IN SUBSEQUENT ROWS.
 3. ALL UNSPECIFIED LINTELS ARE 4x8 UNLESS NOTED OTHERWISE.

NOTE:
ROOF TILE SHALL BE UNITED STATES TILE COMPANY CLAYLITE TILE, EOR 101, AND SHALL NOT WEIGH MORE THAN 10.1 PSF.

Piña
structural engineering

Paul C. Piña, Principal
1983 W. 190th St. Suite 200
Torrance, CA 90504
(310) 516-9300 office
(310) 508-1606 cell
structure@roadrunner.com

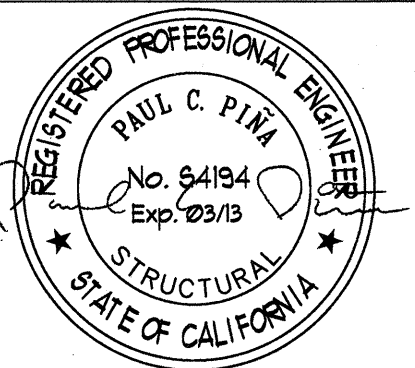

NO.	ISSUED FOR	DATE
	PLAN CHECK	8/8/11
	PLAN CHECK	10/18/11

RESIDENCE ADDITION
217 SOUTH MCCADDEN PLACE
LOS ANGELES CA 90004

JOB NUMBER
S2207
DRAWN BY
CADpros
CHECKED BY
PCP

ROOF FRAMING PLAN

S1.3

RTT JAN 27 2012