




NO.	ISSUED FOR	DATE
	PLAN CHECK	8/8/11
	PLAN CHECK	10/18/11

RESIDENCE ADDITION
217 SOUTH McCADDEN PLACE
LOS ANGELES CA 90004

JOB NUMBER
S2207
DRAWN BY
CADpros
CHECKED BY
PCP

**BASEMENT
FOUNDATION
PLAN**

S1.0

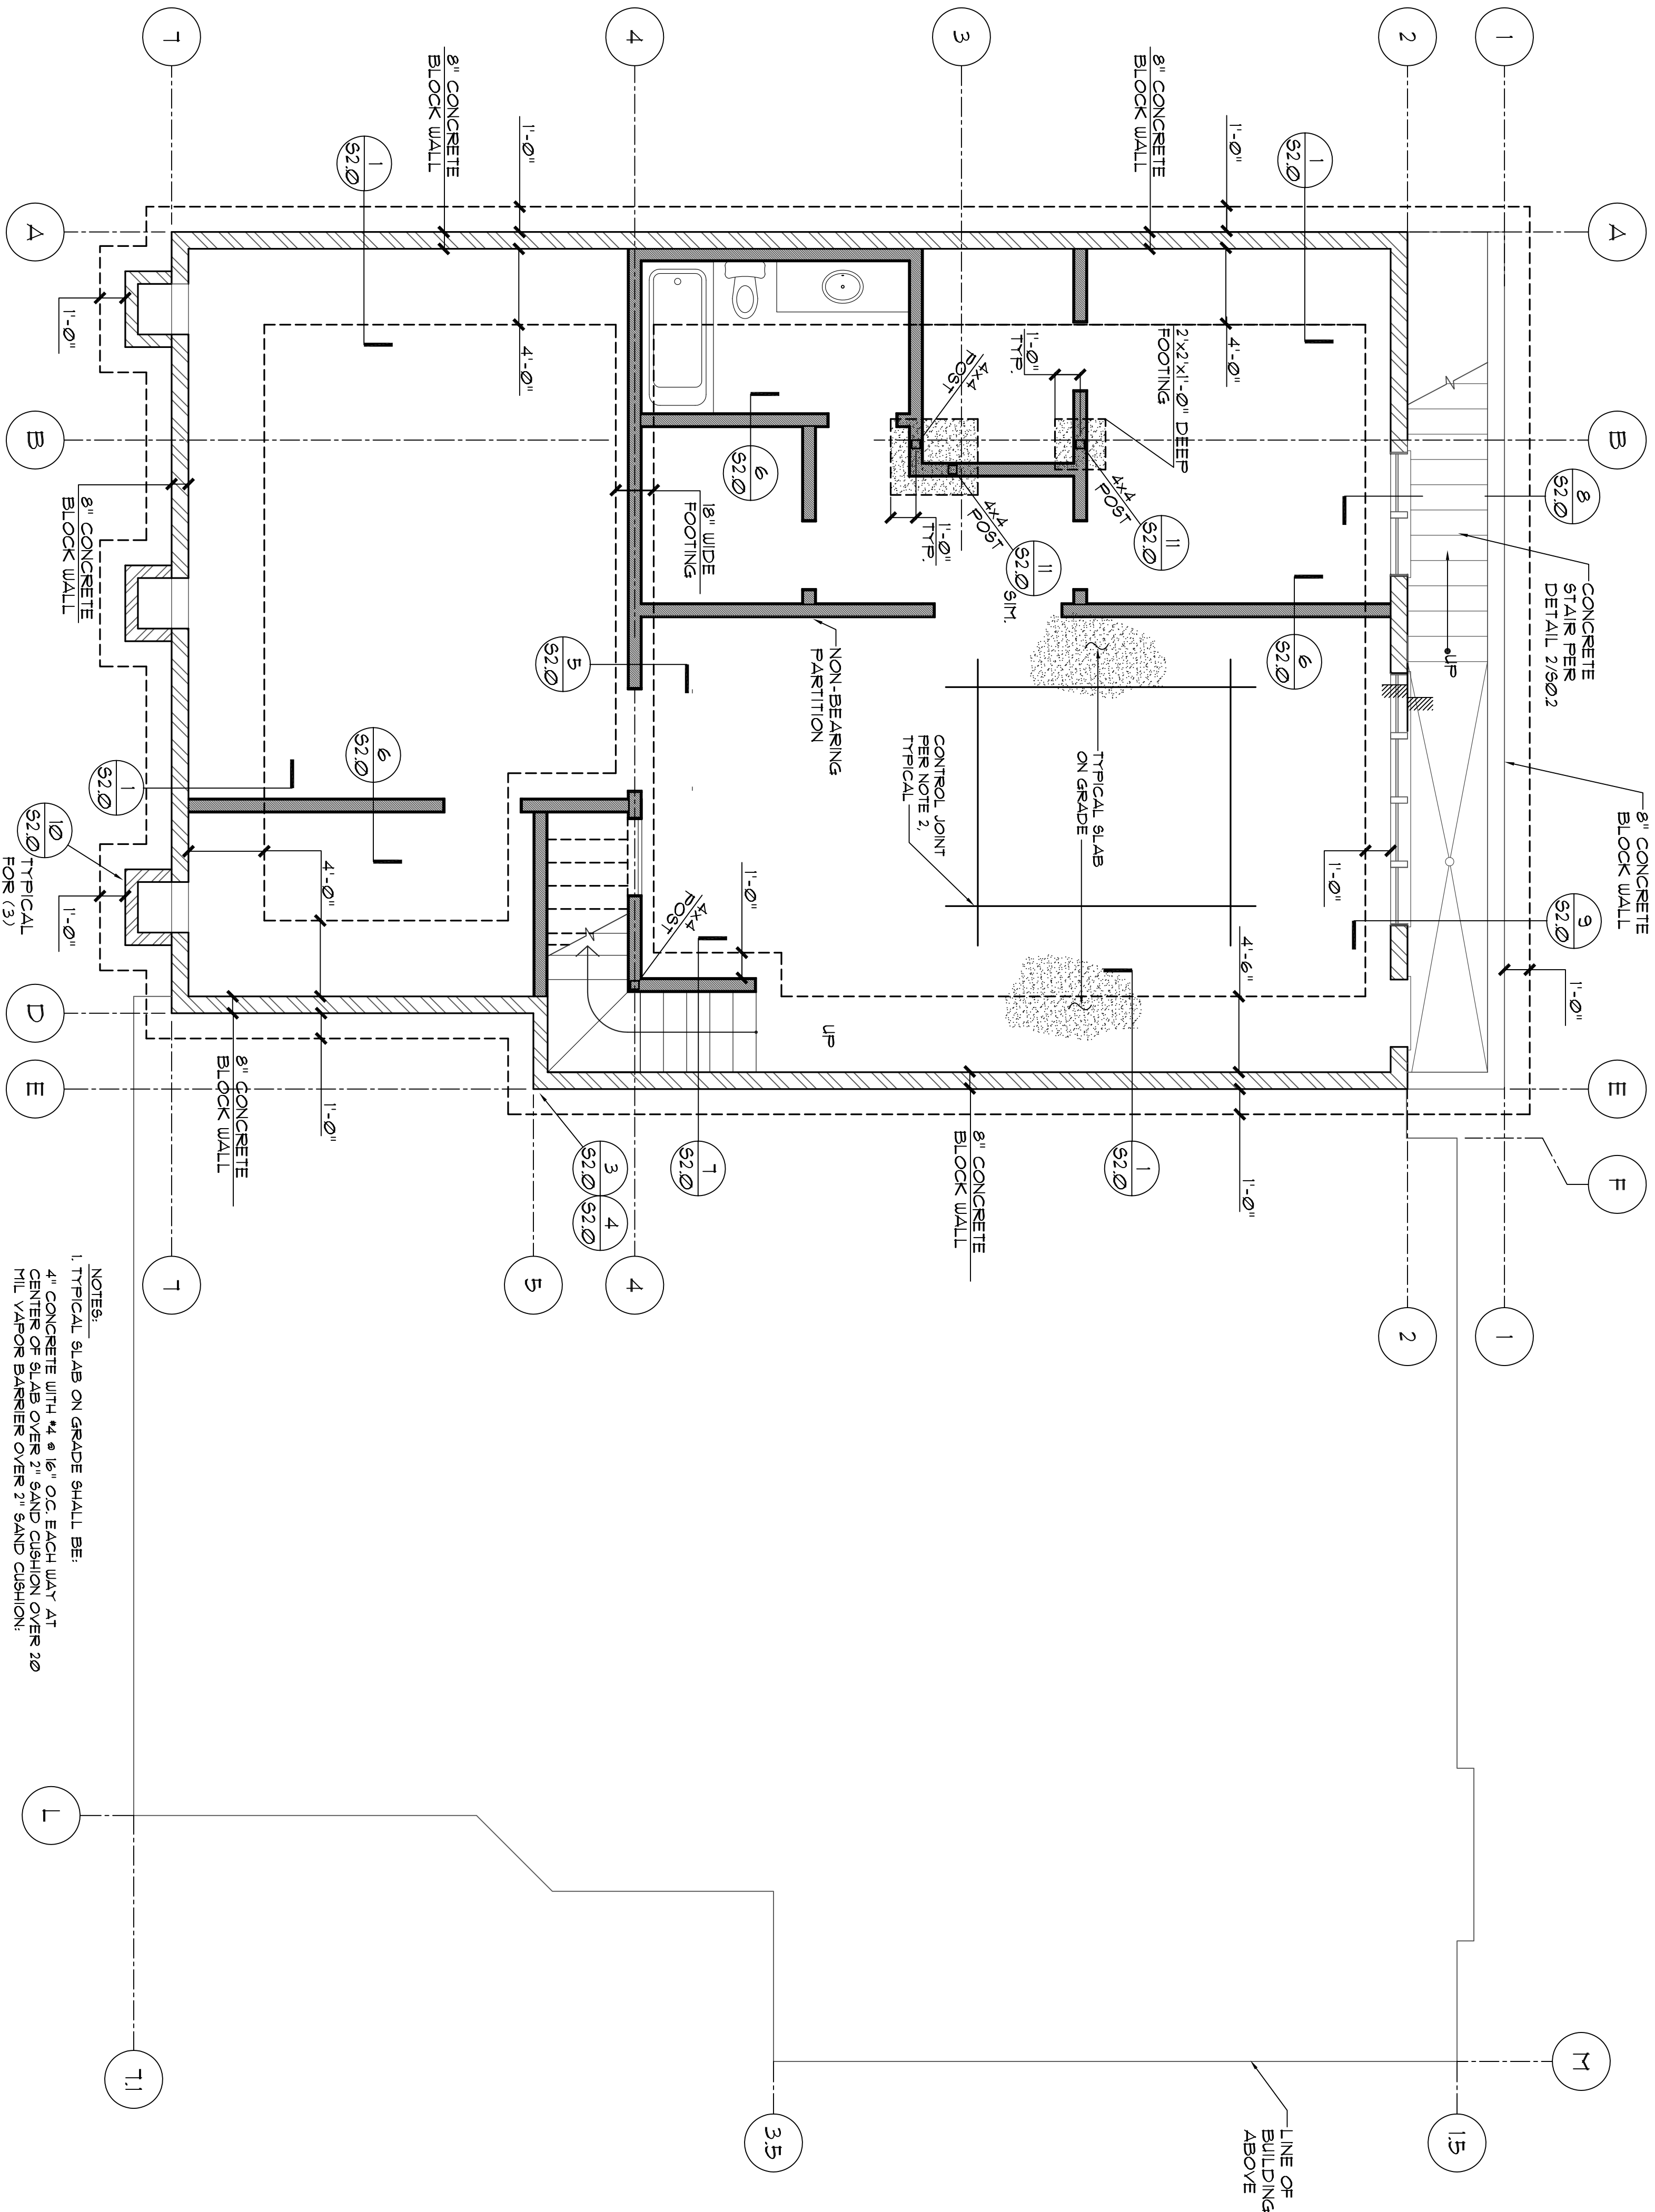

- NOTES:
1. TYPICAL SLAB ON GRADE SHALL BE:
4" CONCRETE WITH $\frac{1}{4}$ " @ 16" O.C. EACH WAY AT CENTER OF SLAB OVER 2" SAND CUSHION OVER 20 MIL VAPOR BARRIER OVER 2" SAND CUSHION.
 2. PROVIDE CONTROL JOINTS AT 10'-0" MAXIMUM ON CENTER:
1/4" DEEP TOoled JOINT WITH 1/4" RADIIUS OR 1/8" x 3/4" SAWCUT, WITHIN 8 HOURS OF PLACING CONCRETE.
 3. EXTERIOR WALL STUDS AND PLUMBING WALLS SHALL BE 2x6 STUDS @ 16" O.C. D.F. NO. 1 UNLESS NOTED OTHERWISE. STUDS ON LOWER GRADE MATERIAL AND BLOCK OR TYPICAL STUDS ON WALLS SHALL BE 2x4 STUDS @ 16" O.C. STUDS MAY BE 2x4 STUDS AT 16" O.C. VERIFY STUD SIZES WITH ARCHT. DWGS.